

How to Install Tarp onto Roller

Pioneer HR4759 Tarp being
installed onto a H7002C Roller

Step 1:


- Lay tarp on floor, with reinforcement side towards ground. Pull apart, nice and neat. Also have three pieces of shock cord nearby.

Tarp laid out in preparation for install



- There are three sets of loops on the top of the tarp. There are three pieces of “shock cord” provided with each tarp.
- “Shock Cord” is a bungee cord type rope. The cord gets tied and directed from left to right


Red stars indicate each loop on the tarp.

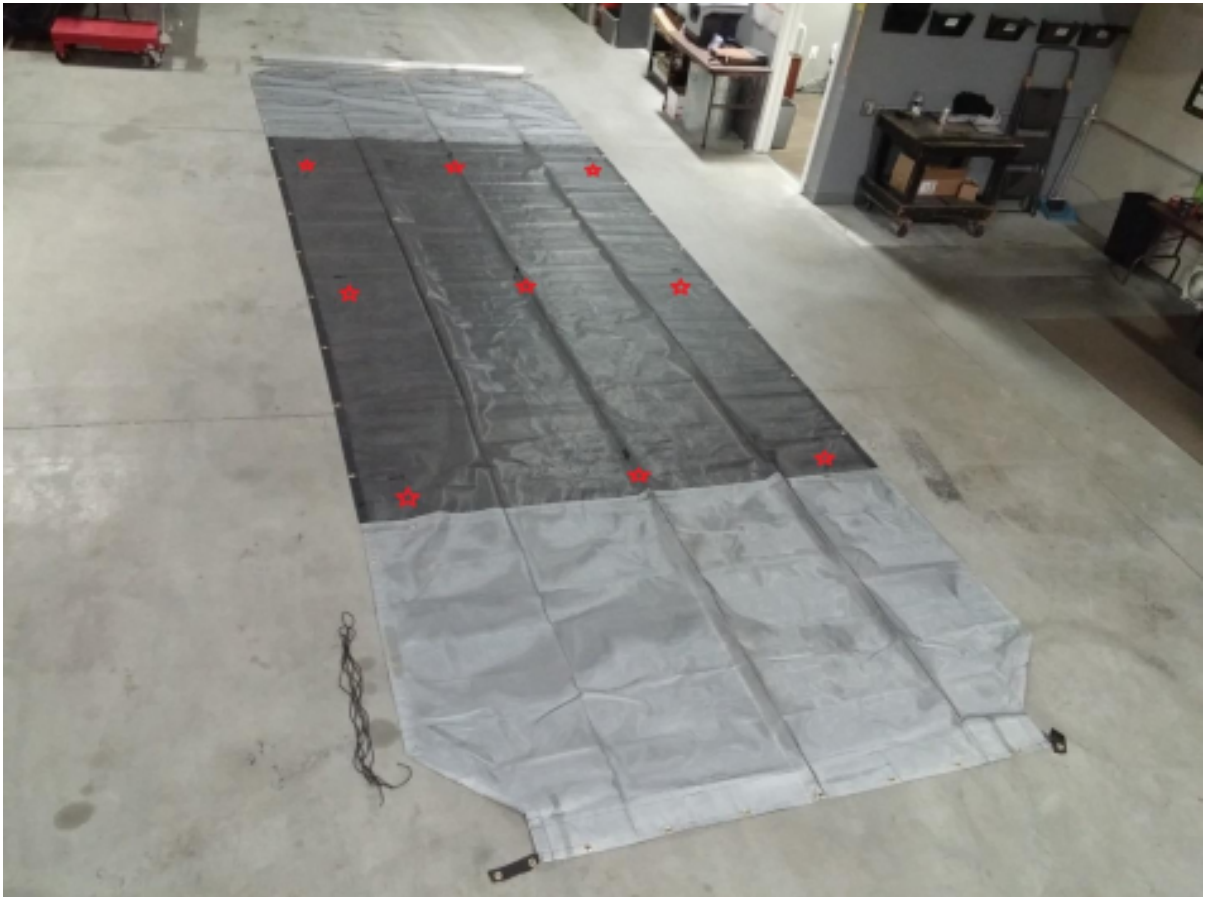

**Close up of one of edge loops
(where the first knot is to be tied)**




Center loop:

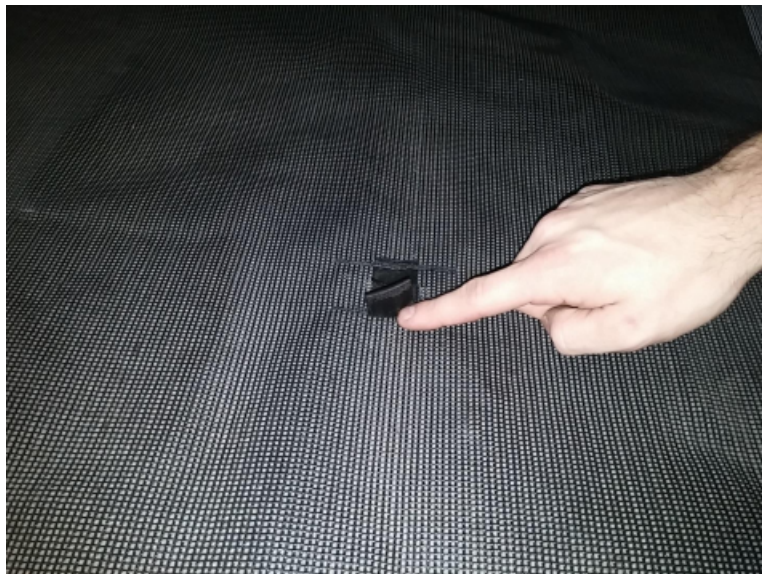

Step 2:

- Tie a knot in either of the loops at the edge of the tarp. It can be either the Drivers side or Passengers side. It does not matter.

Tie double or triple knot on edge loop.

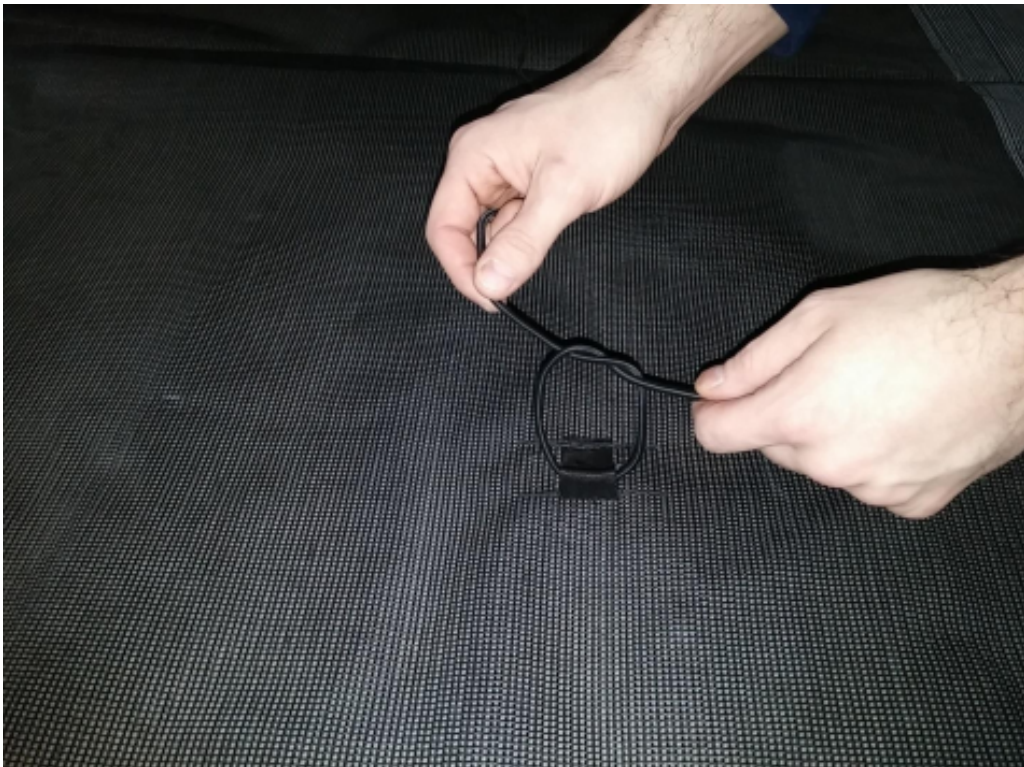

Step 3:

- Run the Shock Cord **THROUGH** the center loop. Just like threading a needle.

Run cord through center loop



Step 4:

- Now, tie off the last Loop.
- **Pull the slack out of the shock cord and then pull an additional 6 to 10 inches (of tension).**
- Only tie a decent single knot, because you may have to readjust later (either by adding more or less tension)

The tarp should now look like this:



Step 5:

- Attach Tarp to the roller. Bolts and Washers go through grommets. Make sure tarp is coming out BOTTOM of Roller when done.



Step 6:

- Wind the tarp onto Roller.
- As the tarp gets wound onto the Roller, fold the “Flaps” underneath the Tarp.
- The Tarp is 9’ wide, but needs to be folded to fit on the roller.

Multiple people helping is beneficial.







Step 7:

- Install Roller on to arms and wind.
- We have a video of how to wind the roller here at this link:

<https://www.youtube.com/watch?v=kvRLez70jyQ>

- **This is where you may have to add a little more tension to the Shock Cords (or take some tension off).**
- Tie all knots securely once you run the arms a few times. Flaps should fold over side of container on their own when covering, and fold up on their own when un-covering.

Quick Winding Roller Instructions

- – As viewed from **DRIVERS** side
- – Wind the **SHAFT** (not the aluminum Tube)
- – 7 Revolutions
- – Counterclockwise